


Air & water-tight seal



Consistent seal quality



Comprehensive range of spares

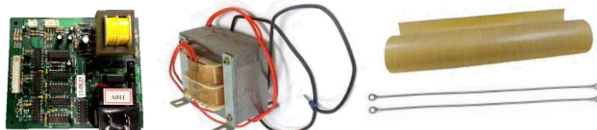

SPECIFICATIONS

Sealing Length: 600mm

Seal Width: 5mm

Timer Duration: 0.2 – 2.5 seconds

Congealed Timer Duration: 1 – 8 seconds

Auto Function Timer Setting: 1 – 8 seconds

Cable Type Foot Pedal

Power Consumption: 1500W

Voltage/Frequency: 230V-240V/50Hz

Electrical Plug Type M-16A

IEC 60 335-2-45 Compliant

Weight: 33Kg

Sealing PE/PP/LDPE/PVC Thermoplastics

Maximum Material Thickness: 300 micron

Packaging: 1 Pc / Box

Wire Element & Fuse Spares Kit Included

USAGE

This efficient, consistent, auto type industrial heatsealer is appropriate for use with most types of thermoplastic.

The sealer uses an electromagnet mechanism to activate the sealing arm. 2 sealing modes provide the user with the option to use the cable type foot pedal (Manual Mode) or the Recycle Timer (Auto Mode).

The additional Congealing Timer allows for a longer cooling time & a consistent more secure seal.

